


TIPO	CARGA (kp/m.)	L (m.)	L bulón (m.)	e (cm.)	a (cm.)	b (cm.)	Hp max (m.)	hc (m.)	Ø Bulón (mm.)	Peso (kp/m.)
PO10	780	10	9,75	20	25	45	4,00	5,50	40	175
PO12	780	12	11,75	20	25	50	4,00	5,80	40	187
PO14	780	14	13,75	20	25	55	4,00	6,10	40	200
PO16	780	16	15,75	20	25	60	4,00	6,40	40	212
PO18	780	18	17,75	20	25	60-65	4,00	6,70	40	212-225
PO20	780	20	19,70	20	25	65-70	4,00	7,00	40	225-237
PO22	700	22	21,70	20	30	80	4,00	7,30	45	275
PO24	700	24	23,75	20	30	90	4,00	7,60	45	300

Los pórticos triarticulados se utilizan en la ejecución de estructuras con una pendiente de cubierta del 30% y con luces máximas que rondan los 24m.

OPCIÓN DE APLOMADO INTERIOR

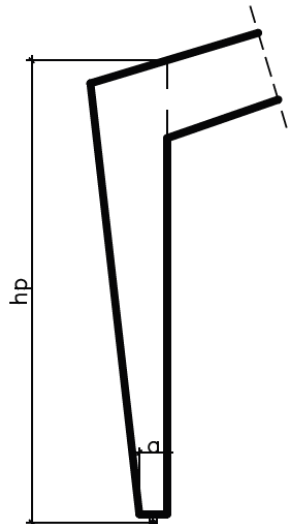

OPCIÓN DE MÉNSULAS



SECCIÓN A-A

